


circuit for single color

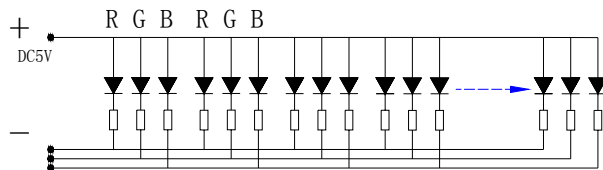

circuit for RGB color

**Technical Features**

- \* available in these colors: red, yellow, green, blue, white, warm white and chameleon
- \* only parallel connection is allowed
- \* seperable every 3 leds. The seperable point is marked by a blace line on the PCB. After cutting, each unit can be working individually under 12V DC.
- \* 0.6A current for a complete strip.
- \* a complete strips composes of 30 SMD top LEDs.
- \* size of the smallest unit (length × width): single color 46 × 8mm, chameleon/RGB 56 × 10mm.
- \* size of the complete strip (length × width × thickness): single color 480 × 8 × 4.2mm, RGB 573 × 10 × 6.7mm
- \* interconnecting wire length is 10mm

single color connection →



RGB color connection →

